i magePROGRAF TC Series



# ALL-IN-ONE DESKTOP LARGE FORMAT PRINTER

Compact & Versatile for Copy, Print & Scan



The brand-new Canon imagePROGRAF TC series provides unparalleled versatility in creating high-quality CAD drawings, posters and large prints. Compact and easy to operate, experience greater productivity that boosts your workflow even in small workplaces with the ability to print up to A1 sizes. Improve business efficiency through enhanced scanning and copying of original documents using the A4 flat-bed scanner.

# **COMPACT EFFICIENCY WITH EXCELLENT PRINT QUALITY**

The brand-new TC series boasts a small footprint with a width of only 24 inches. The all-colour pigment ink and vivid red colour create stunning printouts that impress, and its ease of operation boosts efficiency and productivity.

## **COMPACT WIDTH**

The 24-inch width helps the TC series to easily fit into shelves, or be placed on desks within small offices while allowing for an optional printer stand and desktop basket.



### **BUNDLED APPLICATIONS**

The TC series comes bundled with Canon software and applications designed to streamline any workflow.

#### PosterArtist

Canon's PosterArtist (Web Version) software provides an easy way to create and print visually impressive poster designs.



Try for free at https://posterartist.canon

#### **PIXMA Cloud Link**

PIXMA Cloud Link enables you to store important documents and files in the cloud, where you can access & print them with the TC series.

## **INDUSTRIES & APPLICATIONS**

## **HIGH IMAGE QUALITY**

The TC series features all-colour pigment ink printing and delivers **vivid colour expression** in posters and flyers, especially in **red**. Printouts that are created **do not smudge easily** from water spills & highlighter marks, ensuring that they remain legible.

#### Vivid Red





Printed with conventional colour

Effects of water spills<sup>\*</sup> on prints

Printed with Vivid Red colour

Lines & text remain visible

after water spills

## ALL = 25/15 HMS QWER 10 mm VBNNM QWER TYUI OPASD XC VBNNM FGHJ KLZ XC VBNNM nmbg efg abc TYUI OPASD FGHJ KLZ XC VBNNM +118mm GWER TYUI OPASD FGHJ KLZ XC VBNNM QWER TYUI OPASD FGHJ KLZ XC VBNNM ALL = 25/15 HMS QWER 10 mm VBNNM QWER TYUI OPASD XC VBNNM FGHJ KLZ XC VBNNM nmbg efg bc TYUI OPASD FGHJ KLZ XC VBNNM +118mm

Printed with TC-20

\*Water droplets on the drawing 24 hours after it was printed on plain paper "Red Label 75gsm"

## AUTOMATIC SWITCHING ROLL PAPER / CUT SHEET

The TC series supports output prints of **up to A1-sized**/ **24-inch width** roll paper alongside the easy loading of cut sheet media, while the Auto Sheet Feeder can cater for **100 A4 or 50 A3 sheets.** 







Cut Sheet



### **BUNDLED INK BOTTLES**

The TC series comes with large bundled ink bottles with a total capacity of 280 ml (4 colours x 70 ml), instantly catering for any print needs.




### **MULTIPLE COPY FUNCTIONS**

Enlargement copy, repeat copy, layout copy and image stitch copy functions are available on the TC-20M.

#### **Enlargement Copy**

A4 documents can be scanned and enlarged up to A1 or 24" size on roll paper, or up to A3 on cut sheets to maximize the image automatically. The orientation of the image can be selected on the user panel.

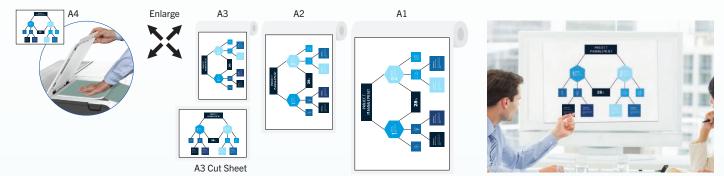

#### **Repeated Copy**

Repeatedly copy an A4 document to fit the width of roll paper. Fitted to maximum roll width of A1/24" inch.







#### Layout Copy\*

Multiple original images can be copied in order into one continuous layout and fitted to the roll paper width. Fitted to maximum roll width of A1/24" inch.



Maximum of 4 A4 original images can be copied





\*Available from August 2023





#### **SPECIFICATIONS**

PRINTER		TC-20	TC-20M	
Printer Type		4-Colour, 24"		
Number of Nozzles		4,352 nozzles (BK: 1,280 nozzles, Other Colours: 1,024 nozzles each)		
Max. Print Resolution		2,400 x 1,200 dpi		
Nozzle Pitch		1,200 dpi x 2		
Line Accuracy <sup>1</sup>		± 0.1% or less		
	Sales Ink	70 ml x 4 (BK / C / M / Y)		
Ink Bottle Size	Bundle Starter Ink	70 ml x 4 (BK / C / M / Y)		
Ink Type		Pigment Ink		
	For Printer	Windows Printer Driver		
Windows Platform	For Scanner	-	Windows Scanner Driver, WIA Driver, Windows Scanner Utility IJ Network Scanner Selector E	
MAC Platform	For Printer	Canon IJ Printer Driver		
	For Scanner	-	IJ Scan Utility Lite	
Print Languages		SG Raster	SG Raster, PDF (USB Memory Direct Print), JPEG (Supported Exif ver2.2/2.21/2.3), Job Control: IVEC	
Print Solutions		Apple AirPrint, Mopria, ChromeOS, Canon PRINT Inkjet/SELPHY (iOS/Android), Canon Print Service, Free Layout Plus, PosterArtist Web, Direct Print Plus (PDF/JPEG), PIXUS/PIXMA Cloud Link		
Management Solutions		Media Configuration Tool, Quick Utility Toolbox, Wi-Fi Connection Assistant, Printer Update Utility		
Interface (Built-in)	USB A Port	-	USB Memory (Direct Print), JPEG/PDF <sup>'2</sup> (Exif ver2.2/2.21/2.3)	
	USB B Port	Hi-Speed USB, Full Speed (12 Mbit/sec), Hi-Speed (480 Mbit/sec) Bulk Transfer, Series B (4 pins)		
	Network	IEEE 802.3 10base-T, IEEE 802.3u 100base-TX SNMP, HTTP, TCP/IP (IPv4/IPv6)		
	Wireless LAN	IEEE802.11 b/g/n WPA-PSK (TKIP/AES) WPA2-PSK (TKIP/AES) WPA3-SAE(AES) WPA-EAP(AES) <sup>3</sup> WPA2-EAP(AES) <sup>3</sup> WPA3-EAP(AES) <sup>3</sup>		
Memory	1	1 GB		
Display		LCD (2.7 inch / 6.7 cm) (Touch Screen, Color)		
OS Compatibility		Windows, Macintosh *Please visit https://asia.canon to confirm OS compatibility and to download the latest drivers.		
SCANNER				
Scanner Type			Flatbed (CIS Scanner)	
,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,			1200 x 2400 dpi	
Optical Resolution (DPI) <sup>*4</sup>	Grayscale		16bit/8bit	
	Colour		RGB 16bit/8bit	
Scanning Speed	Grayscale/ Monochrome	-	1.5 ms/line at 300 dpi	
	Colour		3.5 ms/line at 300 dpi	
Maxmum Documen	- ooroar		A4/LTR (216 x 297 mm)	
PRINT SPEED <sup>15</sup>		A1 SIZE		
	CAD Drawing			
Plain Paper	CAD Drawing	32 sec (Draft) (Monochrome)		





Desktop Basket

#### Printer Stand + Basket \*Printer Stand only available in certain country

Specifications are subject to change without notice.

- <sup>1</sup> User adjustments required. Printing environment and media must match those used for the adjustments. Paper required: Plain paper and coated paper only.
- <sup>2</sup> PDF supports only files generated by TC Series and Canon IJ products.

<sup>13</sup> IEEE802.1X (EAP-TLS/EAP-TTLS/PEAP) supported

<sup>4</sup> Optical resolution is based on the ISO 14473 standard and represents the maximum sampling rate for scanning documents

MEDIA HANDLING		TC-20	TC-20M	
Media Width	Roll Paper		A3 width to 24")	
	Cut Sheet	210 - 297 mm (A3, A4, Letter)		
Media Thickness	Roll Paper/ Cut Sheet	0.08 - 0.28 mm		
Printable	Roll Paper	297 - 610 mm		
Media Width	Cut Sheet	210 - 297 mm		
Printable	Roll Paper	203.2 mm - 4 m		
Media Length Cut Sheet		203.2 - 432 mm		
Media Core Size		2 inch core		
Outside Diameter F	Roll Paper	110 mn	n or less	
Media Feed	Roll Paper	1 Roll		
Media Feed	Cut Sheet	Automatic Switch Function (ASF)		
Delivery Direction		Face-up, Front side		
Margins (Top, Bottom, Side)	Recommended Area (Roll Paper)	Top, Bottom, Left, Right: 5mm *Some photo modes - Top: 30 mm, Bottom: 30 mm		
	Recommended Area (Cut Sheet)	Top, Bottom, Left, Right: 5mm		
	Printable Area (Roll Paper)	Top, Bottom, Left, Right: 5mm *Some photo modes - Top: 30 mm, Bottom: 30 mm		
	Printable Area (Roll Paper Borderless)	-		
	Printable Area (Cut Sheet)	Top, Bottom, Left, Right: 5mm		
DIMENSIONS (W	x D x H) & WEIGH	Γ <sup>•6</sup>		
Packaged Dimensions	Printer	1120 x 726 x 406 mm Weight: 43 kg	1120 x 726 x 406 mm Weight: 45kg	
	Stand + Basket (SD-24) (W x D x H)	1055 x 824 x 268 mm Weight: 16 kg		
	Desktop Basket (BU-06) (W x D x H)	798 x 301 x 111 mm Weight: 1.8 kg		
Printer	Printer	968 x 545 x 395 mm (Auto Sheet Feeder Opened) 968 x 525 x 245 mm (Auto Sheet Feeder Closed) Weight <sup>7</sup> : 32 kg	968 x 545 x 395 mm (Auto Sheet Feeder Opened 968 x 525 x 245 mm (Auto Sheet Feeder Closed) Weight <sup>-7</sup> : 33 kg	
	With Stand + Basket (SD-24) (W x D x H)	968 x 870 x 874 mm (Basket Opened) 968 x 707 x 874 mm (Basket Closed) Weight <sup>-7</sup> : 40 kg	968 x 870 x 874 mm (Basket Opened) 968 x 707 x 874 mm (Basket Closed) Weight <sup>-7</sup> : 42kg	
	With Desktop Basket (BU-06) (W x D x H)	968 x 825 x 965 <sup>-s</sup> mm (Basket Opened) 968 x 595 x 965 <sup>-s</sup> mm (Basket Closed) Weight <sup>-7</sup> : 33kg	968 x 825 x 965' <sup>s</sup> mm (Basket Opened) 968 x 595 x 965' <sup>s</sup> mm (Basket Closed) Weight <sup>-7</sup> : 34kg	
POWER & OPERA	ATING REQUIREME	ENTS		
Power Supply (Prin	iter)	AC 100 - 240	V (50 - 60 Hz)	
Power	Operation	Operation: < 28 W, Sleep Mode: < 1.8 W	Operation: < 26 W, Sleep Mode: < 1.9 W	
Consumption (Printer)	Sleep Mode	< 2.4 W		
	Power OFF	< 0.3 W		
Recommended	Temperature	15 - 3	30 °C	
Environment	Humidity	10 - 80% RH (no dew condensation)		
Acoustics	Power'9	Approx. 6.0 Bels		
	Pressure'9	Approx. 42.5 dB(A), Standby 35 dB(A) or less	Approx. 41.5 dB(A), Standby 35 dB(A) or less	
OPTIONAL ACCES	SORIES			
Roll Unit				
2/3" Roll Holder		-		
Printer Stand + Basket		SD-24		
Desktop Basket		BU	-06	
CONSUMABLES				
Ink Bottle		PFI-050 (70 ml)		
Print Head		PF-08		
Cutter Blade		Not applicable		
Maintenance Cartridge		MC-32		

<sup>15</sup> Time taken to print one page does not include time required for data processing, data transfer and pre-printing operations.

- <sup>6</sup> Includes roll holder set.
- <sup>17</sup> Weight includes print head, excluding ink.
- <sup>18</sup> Height above which desktop basket's cloth does not touch the floor when opening the desktop basket.
- <sup>'9</sup> Acoustic power and pressure are measured using ISO 7779 standard.

SOUTH AND SOUTHEAST ASIA REGIONAL HEADQUARTERS Canon CANON SINGAPORE PTE. LTD.

1 Fusionopolis Place, #14-10 Galaxis, Singapore 138522 Tel : 65-6799-8888 | Fax : 65-6799-8882 | https://asia.canon Delighting You Always

## CANON MARKETING (MALAYSIA) SDN. BHD. No. 6-2-01, Canon Tower , UOA Business Park (Tower 6), Jalan Pengaturcara U1/51A,

Seksyen U1, 40150 Shah Alam, Selangor, Malaysia Tel: 1-800-18-2000 | Fax: 6(03) 5567 9474 | my.canon

**DEALER'S STAMP** 

This document is for information purposes only. The contents are subject to change without notice. Product options, name and availability may vary by regions. We expressly disclaim any liability or contractual obligations with respect to this document. Brands and product names are trademarks and/or registered trademarks of their respective owners.

